



2024 TARGET

 **EASTON**

*Made In USA
Winning Worldwide*





X10

CONNECTING YOU TO THE 10 RING

X10 arrow shafts stand as the ultimate testament to precision and performance winning every Olympic medal since 1996. Crafted with the finest aluminum and carbon (A/C) materials using Easton's exclusive proprietary process, each X10 shaft embodies meticulous attention to detail. From the choice of materials to the intricacy of engineering, no element is left to chance. With an unyielding emphasis on accuracy, these shafts empower archers to reach unmatched levels of excellence with every release. Experience the zenith of precision, where every facet contributes to hitting the 10-ring, shot after shot.



DUAL TAPER

The *Easton X10* arrow is the pinnacle of recurve competition shafts. With unmatched success, it has clinched more Olympic and world titles than any other archery product. Its cutting-edge construction blends high-modulus carbon fiber and slim-wall aluminum for unparalleled precision. Engineered components include a custom barreled design for optimal clearance, forgiving finger releases, and frequency match with modern recurve bows.



SINGLE TAPER

Since its introduction, the *X10 Protour* has won more titles and set more records for compound archers than all other choices combined. Specifically engineered for compound target competition, Protour features a front taper allowing for every size to use Easton X10 point components. The precisely engineered mass-to-spine ratio of each Pro Tour size ensures the best ballistic performance at longer distances and gives archers a big advantage in the wind. With unmatched precision and legendary durability Pro Tour sits at the pinnacle for compound target precision.



NEW PARALLEL

The newest member of the X10 arrow portfolio of products the *X10 Parallel Pro* brings legendary X10 tolerances, quality and precision to a 4MM aluminum/carbon (A/C) shaft. Using the highest quality, high-modulus carbon fiber, every weight-coded X10 4MM Parallel Pro provides a lighter weight parallel option ideal for every form of archery including recurve, compound, target, field, and barebow.



Crafted by Easton in the USA.

X10™

3.2MM ALUMINUM CARBON

High-strength carbon fiber bonded to a 7075 alloy core

Straightness: ± .001"

Weight tolerance: ± 0.5 grains in precise weight codes

Barreled profile

Designed for recurve bows

Components sold separately



RECOMMENDED COMPONENTS



3.2MM X10 Ballistic Tungsten Break-off Point
(100-120, 100-140 gr.) Fits all sizes.



3.2MM X10 Stainless Steel Break-off point
(80-100, 100-120 gr.) Fits all sizes.



3.2MM X10 Pin™
(8 gr.)



Pin™ Nock
(2 gr.)



3.2MM X10 Nock Collar
(3 gr.)



G Pin™ Nock (compound)
(4 gr.)

Meticulously crafted to exact spine specifications and weight sorted for industry-leading precision.

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Front Max Trim Inches	3.2MM X10 Pin Fitment	3.2MM X10 Point Fitment	3.2MM X10 Nock Collar
325	9.2	.221	34.25	6.0	#1	All	#1
350	8.8	.218	34.00	6.0	#1	All	#1
380	8.9	.215	33.75	6.0	#1	All	#1
410	8.5	.212	33.75	5.0	#1	All	#1
450	8.1	.209	33.50	5.0	#1	All	#1
500	7.8	.206	32.00	3.5	#1	All	#1
550	7.5	.203	31.00	3.0	#1	All	#1
600	7.0	.200	30.00	3.5	#1	All	#1
650	6.8	.197	29.00	3.5	#1	All	#1
700	6.7	.194	29.00	3.5	#1	All	#1
750	6.4	.191	29.00	3.5	#1	All	#1
830	6.2	.188	28.50	No Limit	#1	All	#1
900	5.8	.185	28.00	No Limit	#1	All	#1
1000	5.3	.182	28.00	No Limit	#1	All	#1

¹ Due to the barrel design of the X10, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 6-7 grains.

² Nominal O.D. at mid-point of shaft. Ends are smaller.

³ Recommended that no more than these lengths be cut from the front of the shaft.

X10™ PROTOUR™

3.2MM ALUMINUM CARBON

Lightweight, high-modulus carbon fiber bonded to a 7075 alloy core

Straightness: ± .001"

Weight tolerance: ± 0.5 grains in precise weight codes

Tapered profile

Designed for compound bows

Components sold separately



RECOMMENDED COMPONENTS



3.2MM X10 Ballistic Tungsten Break-off Point
(100-120, 100-140 gr.) Fits all sizes.



3.2MM X10 Stainless Steel Break-off point
(80-100, 100-120 gr.) Fits all sizes.



3.2MM X10 Pin™
(8 gr.)



Pin™ Nock
(2 gr.)



3.2MM X10 Nock Collar
(3 gr.)



G Pin™ Nock (compound)
(4 gr.)

Meticulously crafted to exact spine specifications and weight coded for industry-leading precision.

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Front Max Trim Inches	3.2MM X10 Pin Adapter Fitment	3.2MM X10 Point Fitment	3.2MM X10 Nock Collar
340	8.8	.213	34.00	7.0	#2	All	#5
380	8.4	.207	34.00	7.0	#2	All	#5
420	8.0	.202	33.75	6.5	#2	All	#4
470	7.6	.198	33.75	6.0	#2	All	#4
520	7.3	.194	32.00	5.5	#2	All	#3
570	6.9	.191	31.00	5.0	#2	All	#3
620	6.7	.188	30.00	4.5	#2	All	#3
670	6.5	.186	29.75	4.0	#2	All	#2
720	6.2	.183	29.75	No Limit	#2	All	#2
770	6.0	.181	29.00	No Limit	#2	All	#2

¹ Due to the taper design of the X10 Protour, the grain weight-per-inch shown is an average weight-per-inch of a 29" shaft. Shaft weight is slightly heavier toward the larger-diameter neck end and lighter toward the tapered front end. One inch of shaft cut from the point end typically weighs 6-7 grains.

² Nominal O.D. at mid-point of shaft. Front end is smaller.

³ Recommended that no more than these lengths be cut from the front of the shaft.

X10 PARALLEL PRO™

4MM ALUMINUM CARBON

NEW

High-strength carbon fiber bonded to a 7075 alloy core
 Straightness: ± .001"
 Weight tolerance: ± 0.5 grains in precise weight codes
 Parallel profile
 Components sold separately



RECOMMENDED COMPONENTS



Match Grade 4MM HL Stainless Steel Break-off Point
 (80 - 130 gr.)



4MM Pin™
 (9 gr.)



Pin™ Nock
 (2 gr.)



4MM G Nock™
 (7 gr.)



G Pin™ Nock (compound)
 (4 gr.)



4MM Microlite™ Nock
 (6 gr.)



4MM Nock Collar
 (3 gr.)

Meticulously crafted to exact spine specifications and weight sorted for industry-leading precision.

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	4MM HL Point Fitment	4MM Pin Fitment	4MM Nock Collar
250	10.8	.245	34.00	#4	#4	#7
300	9.5	.236	33.63	#4	#4	#5
340	8.9	.231	33.63	#4	#4	#4
380	8.3	.227	32.63	#3	#4	#4
420	7.8	.224	32.63	#3	#3	#4
470	7.3	.220	32.63	#2	#3	#3
520	7.0	.217	32.63	#2	#2	#3
570	6.6	.215	32.63	#2	#2	#2
610	7.3	.218	31.00	#2	#2	#3
660	6.9	.215	30.75	#2	#2	#2
710	6.5	.213	30.50	#2	#2	#2
810	6.1	.209	30.00	#1	#2	#2
880	5.9	.207	29.50	#1	#2	#1
1000	5.5	.204	29.00	#1	#1	#1
1150	5.5	.208	28.50	#1	#1	#1

ACE™

4MM ALUMINUM CARBON

High-strength carbon fiber bonded to a 7075 alloy core
 Straightness: ± .001"
 Weight tolerance: ± 0.5 grains in precise weight codes
 Barreled profile
 Components sold separately



RECOMMENDED COMPONENTS



Match Grade 4MM HL Stainless Steel Break-off Point
 (80 - 130 gr.)



4MM Pin™
 (9 gr.)



Pin™ Nock
 (2 gr.)



4MM G Nock™
 (7 gr.)



G Pin™ Nock (compound)
 (4 gr.)



4MM Microlite™ Nock
 (6 gr.)



4MM Nock Collar
 (3 gr.)

Meticulously crafted to exact spine specifications and weight sorted for industry-leading precision.

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Max Trim Inches	4MM HL Point Fitment	4MM Point Fitment	4MM Pin Fitment	4MM Nock Collar
370	7.9	.230	32.62	4.0	#1	#1	#1	#1
400	7.5	.230	32.62	4.0	#1	#1	#1	#1
430	7.0	.224	32.62	5.5	#1	#1	#1	#1
470	6.8	.223	32.62	6.5	#1	#1	#1	#1
520	6.7	.216	31.62	4.5	#1	#1	#1	#1
570	6.3	.216	31.62	10.0	#1	#1	#1	#1
620	6.1	.214	30.62	No Limit	#1	#1	#1	#1
670	5.9	.212	30.62	No Limit	#1	#1	#1	#1
720	6.4	.215	29.62	6.0	#1	#1	#1	#1
780	6.0	.216	29.62	No Limit	#1	#1	#1	#1
850	5.7	.213	28.62	No Limit	#1	#1	#1	#1
920	5.8	.213	28.62	9.5	#1	#1	#1	#1
1000	5.7	.213	28.62	No Limit	#1	#1	#1	#1
1100	5.1	.205	28.62	No Limit	#1	#1	#1	#1
1250	5.1	.205	26.62	No Limit	#1	#1	#1	#1

All sizes use: 4MM HL Point 80-130 grain #1 • 4MM ML Point 60-80 grain • 4MM Pin Adapter #1

AVANCE™

4MM CARBON

100% carbon construction
 Straightness ± .0025"
 Weight tolerance ± 1 grain
 Components sold separately
 Parallel profile



RECOMMENDED COMPONENTS



4MM ML Stainless Steel Point
 (60-80, 70-90, 90-110, 100-120 gr.)



4MM Pin
 (9 gr.)



Pin™ Nock
 (2 gr.)



4MM Nock Collar
 (3 gr.)



4MM Microlite™ Nock
 (6 gr.)



4MM G Nock™
 (7 gr.)



G Pin™ Nock (compound)
 (4 gr.)

Spine	Shaft Weight GPI	Shaft OD Inches	Stock Length Inches	4MM ML Point Fitment				Nock Pin Adapter Fitment 4MM Pin	4MM Nock Collar
				100-120 gr	90-110 grain	70-90 grain	60-80 grain		
340	8.8	.240	33.25	#4				#4	#7
400	7.9	.234	33.00	#4				#4	#5
450	7.4	.230	32.75	#4				#4	#4
500	6.9	.227	32.50	#4				#4	#4
550	6.5	.224	32.25		#3			#3	#4
600	6.5	.224	32.00		#3			#3	#4
660	6.2	.220	31.75		#3			#3	#3
730	5.7	.217	31.25		#3			#2	#3
810	5.5	.215	31.00			#2		#2	#2
900	5.2	.211	30.25			#2		#2	#2
1000	4.9	.209	30.00			#2		#2	#2
1150	4.9	.208	29.25			#2		#2	#2
1400	4.2	.205	29.00				#1	#1	#1
1600	3.8	.202	28.75				#1	#1	#1
1800	3.6	.200	28.50				#1	#1	#1
2000	3.4	.198	28.25				#1	#1	#1

AVANCE™ SPORT

4MM CARBON

100% carbon construction
 Straightness ± .005"
 Weight tolerance ± 1 grain
 Parallel profile
 Fletched shafts include points & nocks
 Bare shafts—components sold separately



RECOMMENDED COMPONENTS



4MM ML Stainless Steel Point
 (60-80, 70-90, 90-110, 100-120 gr.)



4MM Pin
 (9 gr.)



Pin™ Nock
 (2 gr.)



4MM Nock Collar
 (3 gr.)



4MM Microlite™ Nock
 (6 gr.)



4MM G Nock™
 (7 gr.)



G Pin™ Nock (compound)
 (4 gr.)

Spine	Shaft Weight GPI	Shaft OD Inches	Stock Length Inches	4MM ML Point Fitment				Nock Pin Adapter Fit 4MM Pin	4MM Nock Collar
				100-120 gr	90-110 grain	70-90 grain	60-80 grain		
340	8.8	.240	33.25	#4				#4	#7
400	7.9	.234	33.00	#4				#4	#5
450	7.4	.230	32.75	#4				#4	#4
500	6.9	.227	32.50	#4				#4	#4
550	6.5	.224	32.25		#3			#3	#4
600	6.5	.224	32.00		#3			#3	#4
660	6.2	.220	31.75		#3			#3	#3
730	5.7	.217	31.25		#3			#2	#3
810	5.5	.215	31.00			#2		#2	#2
900	5.2	.211	30.25			#2		#2	#2
1000	4.9	.209	30.00			#2		#2	#2
1150	4.9	.208	29.25			#2		#2	#2
1400	4.2	.205	29.00				#1	#1	#1
1600	3.8	.202	28.75				#1	#1	#1
1800	3.6	.200	28.50				#1	#1	#1
2000	3.4	.198	28.25				#1	#1	#1

VECTOR™

4MM CARBON

Multi-layer wrapped 100% carbon-fiber construction
 4mm parallel design
 Straightness checked
 Weight matched
 Fletched shafts include points and nocks
 Components sold separately with bare shafts

RECOMMENDED and REPLACEMENT COMPONENTS



4MM N Nock™
 [7 gr.]



4MM Zinc Point
 [70 gr.]

Spine	Shaft Weight GPI	Shaft OD Inches	Stock Length Inches	4MM Zinc Point 70 gr
600	7.6	.228	32.00	#2
800	6.2	.219	31.00	#2
1000	5.4	.214	30.00	#2
1200	5.1	.211	29.00	#1
1400	4.2	.206	28.00	#1
1600	3.8	.202	27.50	#1
1800	3.6	.200	27.00	#1
2000	3.4	.198	26.50	#1



VECTOR™ READY TO SHOOT

4MM CARBON

Multi-layer wrapped 100% carbon-fiber construction
 4mm parallel design
 Straightness checked
 Weight matched
 Fletched with 2" shield-cut feathers
 Ready to shoot—cut to length with nocks & points installed

REPLACEMENT COMPONENTS



4MM N Nock™
 [7 gr.]



4MM Zinc Point
 [70 gr.]

Spine	Shaft Weight GPI	Shaft OD Inches	Stock Length Inches	4MM Zinc Point 70 gr
600	7.6	.228	32.00	#2
800	6.2	.219	31.00	#2
1000	5.4	.214	30.00	#2
1200	5.1	.211	29.00	#1
1400	4.2	.206	28.00	#1



SONIC 6.0™ +MATCH GRADE (PRO SHOP EXCLUSIVE)

6MM CARBON

6mm reduced-diameter higher velocity 100% carbon fiber
 Factory helical fletched (Match Grade AAE™ Hybrid 26™ helical fletched vanes)
 Pre-installed 6mm nocks
 6mm ST Inserts included
 Straightness ± .003"
 Match Grade: ± .001" (PRO SHOP EXCLUSIVE)
 Made in USA



INCLUDED



RECOMMENDED COMPONENTS



SIZE	Shaft Weight GPI	Spine @ 28" Span Deflection in Inches	Stock Length Inches	Field Point O.D. Inches	O.D.	6MM ST Insert Size	6MM Adjustable Point Size
250*	9.5	0.250	32.50	17/64	0.291	#2	NA
300	8.8	0.300	32.00	17/64	0.286	#2	NA
340	7.8	0.340	31.00	17/64	0.279	#2	ONE SIZE
400	7.2	0.400	31.00	9/32	0.275	#1	ONE SIZE
500	6.7	0.500	30.50	9/32	0.273	#1	ONE SIZE
600	5.8	0.600	30.50	9/32	0.268	#1	ONE SIZE


*Fletched six-pack arrows are 32" max stock length.

VENTURE™

6MM CARBON

6mm reduced-diameter higher velocity 100% carbon fiber
 Factory fletched
 Pre-installed 6mm nocks
 6mm ST Inserts included
 Straightness ± .003"

INCLUDED



SOLD SEPARATELY



SIZE	Shaft Weight GPI	Spine @ 28" Span Deflection in Inches	Stock Length Inches	Field Point O.D. Inches	O.D.	6MM ST Insert Size	6MM SD 19 Adjustable Point Size
600	5.8	0.600	30.50	9/32	0.268	#1	ONE SIZE



EASTON 6.5™

MATCH GRADE • HUNTER CLASSIC • BOWHUNTER

6.5MM uniform USA made ACU-CARBON

Pre-installed 6.5MM Microlite™ nocks

Match Grade AAE™ Hybrid 26™ helical fletched vanes

6.5MM inserts included

Straightness:

MATCH GRADE ± .001" (PRO SHOP EXCLUSIVE)

HUNTER CLASSIC ± .003"

BOWHUNTER ± .005"



INCLUDED



6.5MM Microlite™ Nock
(8 grains)



6.5™ Insert
(23 grains) *Included with Match Grade*
Uses 8-32 thread 5/16" field points



6.5™ Insert
(23 grains) *Included with Bowhunter & Classic*
Uses 8-32 thread 5/16" field points

RECOMMENDED COMPONENTS



8-32 Match Grade Point
(100, & 125 grains)



8-32 Multi Point
(100, & 125 grains)



6.5MM CB™ Point
Fits S (6.5MM) diameter arrows
Point Weight - 80 & 100 Grains



6.5MM Brass Insert
(75, 50 grains) *See chart for field point size.*

SIZE	Shaft Weight	Spine @ 28" Span	Stock Length	Field Point	O.D.
	GPI	Deflection In Inches	Inches	Inches	Inches
250*	10.0	0.250	32.50	5/16	0.301
300*	9.5	0.300	32.25	5/16	0.300
340	9.3	0.340	31.75	5/16	0.298
400	8.4	0.400	31.00	19/64	0.294
500	7.3	0.500	30.50	19/64	0.287

*Fletched six-pack arrows are 32" max stock length.

SUPERDRIVE MICRO™

4MM CARBON

Multi-layer wrapped 100% high velocity carbon-fiber construction

Parallel profile

Specifically engineered for outdoor competition

Weight Tolerance: ± 1.0 grain

Straightness ± .002"

RECOMMENDED COMPONENTS



Match Grade 4MM HL Stainless Steel Break-off Point
(80 - 130 gr.)



4MM Microlite™ Nock
(6 gr.)



4MM G Nock™
(7 gr.)



G Pin™ Nock (compound)
(4 gr.)



4MM Pin
(9 gr.)



Pin™ Nock
(2 gr.)



4MM Nock Collar
(3 gr.)

Spine	Shaft Weight	Shaft OD	Stock Length	4MM HL Point Fitment	Nock Pin Adapter Fitment	4MM Nock Collar
	GPI	Inches	Inches	80-130 grains	4MM Pin	
325	8.1	.233	33.25	#4	#4	#5
375	7.4	.228	33.00	#3	#4	#4
425	6.8	.224	32.75	#3	#3	#4
475	6.4	.221	32.50	#2	#3	#3
525	6.1	.218	32.25	#2	#3	#3
575	5.9	.217	32.00	#2	#2	#3
625	5.7	.216	31.75	#2	#2	#2
675	5.6	.215	31.50	#2	#2	#2
750	5.5	.214	31.25	#2	#2	#2
850	5.3	.213	31.00	#1	#2	#2
950	5.1	.210	30.75	#1	#2	#2



SUPERDRIVE 23™

CARBON

Multi-layer wrapped carbon fiber

Straightness: ± .002"

Weight tolerance: ± 1.0 grain

Outside diameter: 23/64" (9.3mm)

World Archery compliant outside diameter

Inserts, points, nocks and pin adapter—sold separately

Super or G UNI Bushings—included

RECOMMENDED COMPONENTS



Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
325	7.4	.361	33.25
375	6.9	.359	32.00
475	6.4	.356	31.50

SUPERDRIVE 25™

CARBON

Multi-layer wrapped carbon fiber

Straightness: ± .002"

Weight tolerance: ± 1.0 grain

Outside diameter: 25/64"

Specifically engineered for indoor and 3D

Super and G UNI bushings—included

Inserts, points, nocks and pin adapter—sold separately

RECOMMENDED COMPONENTS



Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
290	7.8	.396	32.00



SUPERDRIVE 27™

+MATCH GRADE
CARBON

Multi-layer wrapped carbon fiber
 Straightness: ±.005"/Match Grade ± .002"
 Weight tolerance: ± 1.0 grains
 Outside diameter: 27/64"
 Points, and nocks—sold separately
 Super or G UNI Bushings—included
 Components—sold separately

RECOMMENDED COMPONENTS



SD 27™ Adjustable Point
(100 gr.)

Adjustable Point System Weight Module
(10, 20 50 gr.)

Adjustment Wrench



SD 27™ 4MM Kick Out Bushing
(26 gr.)

SD 27™ 4MM Bushing
(18 gr.)

4MM G Nock™
(7 gr.)

4MM Microlite™ Nock
(6 gr.)

SD 27™ 6.5MM Kick Out Bushing
(22 gr.)

SD 27™ 6.5MM Bushing
(19 gr.)

6.5MM Super 3D Nock™
(13 gr.)

6.5MM Microlite™ Super Nock™
(8 gr.)

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
270	9.0	.420	32.125

RX7™

DUAL SPINE ALUMINUM

Weaker tail section helps recurve clearance
 Straightness: ± .001"
 Weight tolerance: ± 0.75%
 Thick-wall front end easily copes with tough European target materials
 Three spines—525, 475, and 420 in a 21, 22, and World Archery™ maximum 23 O.D.




RECOMMENDED COMPONENTS



Adjustable Bullet Point
(100 gr.)

Adjustable Point System Weight Module
(10, 20 50 gr.)

Adjustment Wrench

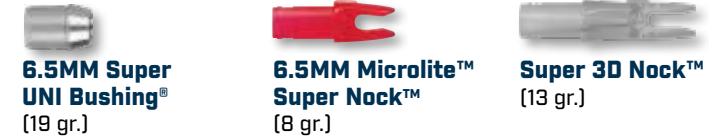

6.5MM Super UNI Bushing®
(19 gr.)

6.5MM Microlite™ Super Nock™
(8 gr.)

Super 3D Nock™
(13 gr.)

Spine	Shaft Weight GPI	Shaft O.D. Inches	Minimum Stock Length Inches	Point Fitment	Bushing Fitment
23-420	10.4	.365	33.75	2315	2315
22-475	9.7	.348	33.50	2214	2214
21-525	9.3	.328	32.50	2114	2114



X23™

ALUMINUM

7178-T9 aerospace alloy 2-tone finish

Straightness: ± .001"

Components—sold separately

World Archery compliant outside diameter

Black point end for better target contrast



RECOMMENDED COMPONENTS




Adjustable Bullet Point

(90 gr.)



Adjustable Point System Weight Module

(10, 20 50 gr.)

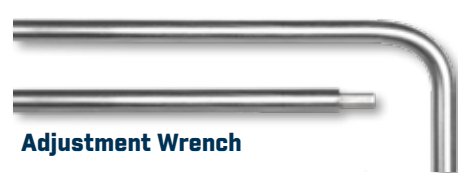

Adjustment Wrench



6.5MM Super UNI Bushing®

(19 gr.)



6.5MM Microlite™ Super Nock™

(8 gr.)



6.5MM Super 3D Nock™

(13 gr.)

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Minimum Stock Length Inches	6.5 Bushing Weight (grains)
2312	.429	9.5	.363	31.75	11
2314	.397	10.8	.357	32.25	10
2315	.348	11.8	.365	32.60	11
2318	.304	13.7	.365	34.75	11

X27™

ALUMINUM

7178-T9 aerospace alloy 2-tone finish

Straightness: ± .001"

Components—sold separately

Black point end for better target contrast



RECOMMENDED COMPONENTS




Adjustable Bullet Point

(90 gr.)



Adjustable Point System Weight Module

(10, 20 50 gr.)

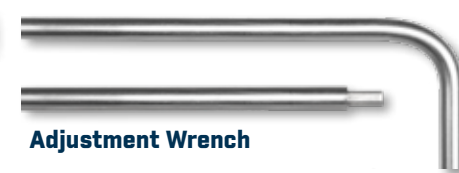

Adjustment Wrench



6.5MM Super UNI Bushing®

(19 gr.)



6.5MM Microlite™ Super Nock™

(8 gr.)



6.5MM Super 3D Nock™

(13 gr.)

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Minimum Stock Length Inches	6.5 Bushing Weight (grains)
2712	.267	11.3	.420	33.00	19



X7 ECLIPSE™

ALUMINUM

7178-T9 aluminum alloy

Hard-anodized black finish

Straightness: ± .001"

Weight tolerance: ± .75%

G-UNI/Super UNI bushing installed

Nocks and points sold separately

Sizes 1514 through 2214 are World Archery compliant



RECOMMENDED COMPONENTS



Bullet Point



4MM G-UNI Bushing®
[for sizes 1914 and smaller]



4MM G Nock™
[for sizes 1914 and smaller] [7 gr.]



6.5MM Super 3D Nock™
[13 gr.]



RPS Insert



6.5MM Super UNI Bushing®
[19 gr.]



4MM Microlite™ Nock
[6 gr.]



6.5MM Microlite™ Super Nock™
[8 gr.]

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Minimum Stock Length Inches	4MM Bushing Weight (Grains)	6.5MM Bushing Weight (Grains)	Bullet Point Weight (grains)	Insert Weight (grains)	Screw-In Point Size
2413	.372	10.5	.372	34.00	NA	12	100	40	11/32
2214	.431	10.4	.318	33.38	NA	9	100	NA	NA
2213	.464	9.9	.344	33.50	NA	9	90	30	11/32
2114	.511	9.9	.328	32.50	NA	7	90	25	5/16
2014	.584	9.6	.314	31.63	NA	5	90	NA	NA
1914	.663	9.3	.300	30.88	9	NA	90	NA	NA
1814	.804	8.6	.284	29.88	8	NA	65	NA	NA
1714	.967	8.1	.268	29.38	7	NA	60	NA	NA
1614	1.157	7.7	.251	28.25	5	NA	50	NA	NA
1514	1.384	6.8	.244	26.50	5	NA	50	NA	NA

XX75 PLATINUM PLUS™

ALUMINUM

7075-T9 aluminum alloy

Hard-anodized finish

Straightness: ± .002"

Weight tolerance: ± 1%

Super or G UNI bushings—installed

Components—sold separately



RECOMMENDED COMPONENTS



Bullet Point



6.5MM Super UNI Bushing®
[19 gr.]



4MM G-UNI Bushing®
[for sizes 1914 and smaller]



RPS Insert



6.5MM Super 3D Nock™ [13 gr.]



Microlite™ Super Nock® 6.5MM [8 gr.]



4MM Micro Nock
[6 gr.]



4MM G Nock™
[for sizes 1914 and smaller] [7 gr.]

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Minimum Stock Length Inches	Bushing Weight 4MM (Grains)	Bushing Weight 6.5MM (Grains)	Bullet Point Weight (grains)	Insert Weight (grains)	Screw-In Point Size
2213	.464	9.8	.344	30.50	NA	15	90	52	11/32
2114	.513	9.9	.328	30.00	NA	15	90	52	11/32
2016	.537	10.6	.312	31.00	17	12	90	40	11/32
2013	.616	9.0	.313	32.00	14	9	90	NA	NA
1916	.627	10.0	.297	30.00	13	9	90	30	11/32
1913	.738	8.3	.298	31.00	14	9	90	30	11/32
1816	.759	9.3	.281	29.00	11	7	75	25	5/16
1716	.882	9.0	.266	29.00	9	NA	65	NA	NA
1616	1.082	8.4	.250	27.50	7	NA	60	NA	NA
1516	1.405	7.3	.234	26.75	5	NA	50	NA	NA
1416	1.685	7.2	.219	26.25	5	NA	50	NA	NA



XX75 JAZZ™

ALUMINUM

7075 aerospace alloy
 Hard-anodized finish
 Straightness: ± .005"
 Weight tolerance: ±2%
 Bushing Installed
 Components—sold separately



RECOMMENDED COMPONENTS



Bullet Point



4MM G-UNI Bushing®
 (for sizes 1914 and smaller)



RPS Insert



4MM G Nock™
 (for sizes 1916 and smaller) [7 gr.]

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Minimum Stock Length Inches	Nock Size	Bullet Point Weight (grains)	Insert Weight (grains)	Screw In Point Size
2016	.567	10.6	.312	32.00	6.5MM	90	20	5/16
1916	.627	10.0	.297	31.00	4MM	90	16	5/16
1816	.759	9.3	.281	30.00	4MM	75	12	9/32
1716	.882	9.0	.266	29.00	4MM	65	10	17/64
1616	1.082	8.4	.250	28.50	4MM	60	NA	NA
1516	1.405	7.3	.234	27.50	4MM	50	NA	NA
1416	1.685	7.2	.219	27.00	4MM	50	NA	NA
1214	2.501	5.9	.197	26.50	4MM DIRECT FIT	45	NA	NA

GENESIS™

ALUMINUM

7075 aerospace alloy
 Hard-anodized
 Straightness: ± .005"
 Weight tolerance: ± 2.5%
 UNI bushing, nock, and point—installed
 Available in black, purple, silver and teal



National Archery in the Schools Program

The ONLY arrow approved for all NASP® tournaments and events.

RECOMMENDED COMPONENTS



Genesis Point



4MM N Nock™
 [7 gr.]



UNI Bushing®
 [18 gr.]

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Minimum Stock Length Inches
1820	0.595	12.2	.282	30.00



EZ FLETCH™

(A) SMALL DIAMETER MULTI-KIT

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"

(B) SMALL DIAMETER 2" MINI HELICAL TOOL

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"

(C) LARGE DIAMETER MULTI-KIT

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"

(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"

VANES

All weights are within ±0.5 grain

2" BULLY™ VANES BY BOHNING®

Ultra-stiff design for high speed stability



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
200	2.00	.568	6.5	<ul style="list-style-type: none"> ● Fire Orange ● Bright Green ● Red ● Yellow ○ White 	100 Ct. 36Ct.

BTV 3" VANES™ BY AAE™



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	<ul style="list-style-type: none"> ● Yellow ● Bright Green ● Red ● Fire Orange ○ White 	100 Count

EZ Fletch is a trademark of Arizona Rim Country, Inc.
Bohning is a registered trademark of the Bohning Company Ltd.
AAE is a trademark of Arizona Archery Enterprises Inc.

VANES

DIAMOND HD 3" VANES™ BY BOHNING



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	<ul style="list-style-type: none"> ● Bright Green ● Yellow ● Red ○ White ● Orange 	100-ct.

DIAMOND VANES™ BY AAE



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
175	1.750	.375	3	<ul style="list-style-type: none"> ● Bright Green ● Blue ● Yellow ● Fire Orange ○ White ● Black ● Hot Pink 	100-ct.
235	2.375	.375	4		
280	2.875	.500	6		
380	3.875	.500	8		

TITE FLIGHT™ VANES BY AAE

Special rib adds stiffness to cut in-flight flutter and noise



Size	Length (in)	Height (in)	Weight (grains)	Colors	Packaging
200	2.00	.330	4	<ul style="list-style-type: none"> ● Hot Pink ○ White ● Bright Green ● Black ● Fire Orange ● Yellow ● Blue 	100-ct.

SPIN WING VANES™

1.75-inch vanes available in right wing • Packaging - 50-count bag



Colors ● Black ○ White ● Blue ● Red ● Yellow


Spin Wing is a trademark of Range-O-Matic Archery Company.

BEGINNER ARCHERY

BEGINNER BOW

The Easton beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous for right or left-handed archers
- Integrated sight channel
- Custom Dacron™ string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and armguard



Kit colors: Black, Pink, and Realtree® Xtra



SCOUT 2™

- Durable fiberglass construction
- Over Nock - installed
- Sleeve Point - installed
- 28"



BEGINNER FINGER TAB



STABILIZERS



HALCYON™

- Very low resonance for faster damping and a steadier hold
- Unmatched wind drag resistance
- Class-leading 14MM ultra-high modulus graphite fiber construction
- Windcutter 360 design
- Weights not included

	Main Stabilizers			Side Rods		
Size	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-76 cm
Ounces	4.4	4.7	5	2.9	3	3.4
Grams	125.5	133	140	83.1	88.3	96.6



Halcyon stabilizers come with a reusable protective sleeve



CONTOUR CS™

- Complex unidirectional and cross weave high modulus carbon and ultra high modulus graphite construction for extreme stiffness, fast damping rate and a steadier hold for both compound and recurve
- Proven in both compound and recurve top level competition worldwide
- Extremely light weight, greater stiffness to weight ratio than any stabilizer currently available
- Drag reducing Windcutter 360 design
- Weights not included

Includes reusable protective sleeve and 1/4-20 to 5/16-24 adapter.

	Main Stabilizers			Side Rods		
Size	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-76 cm
Ounces	4.0	4.3	4.5	2.5	2.6	2.85
Grams	115	122	128	71	74	81



Contour CS stabilizers come with a reusable protective sleeve

STABILIZERS



CONTOUR™

- Complex High Modulus Carbon, multi-diameter design
- Faster damping and a steadier hold with less wind drag
- Stiff and light self-damping design ideal for recurve performance
- Weights not included

	Main Stabilizers				Side Rods		
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	3.7	4.0	4.3	4.6	2.5	2.7	2.9
Grams	106	114	123	131	71	75	83



Z-FLEX™

- High stiffness ideal for top level compound and 3D competition
- High Modulus Carbon construction
- Built-in AVRS™ damping system
- Less aiming float and highly efficient
- Weights not included

	Main Stabilizers				Side Rods		
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	5.8	6.2	6.5	6.9	3.2	3.5	3.9
Grams	164	175	186	196	92	99	111



- Ultra-stiff design for steady aiming
- AVRS™ damping for active-shock management
- Lowest mass and highest efficiency



Z-Flex stabilizers come with a reusable protective sleeve



Z COMP™

- Balanced feel with lower mass and smaller diameter
- High Modulus Carbon construction
- Weights not included

	Main Stabilizers		Side Rods	
Size	27 in-69 cm	30 in-76 cm	10 in-25 cm	12 in-30 cm
Ounces	6.2	6.5	3.2	3.5
Grams	175	186	92	99



- Ultra-stiff design for steady aiming
- Fast-damping high frequency response
- AVRS™ damping for active-shock management
- 100% high modulus carbon at a smaller 0.600" diameter

STABILIZER COMPONENTS

PRO-LINK™ EXTENDER

- Internal stainless steel reinforcement beam with high modulus carbon construction
- Stiffest extension ever made by Easton
- Engineered for extreme reliability

	PROLINK Extender		
Size	6 in-15 cm	5 in-13 cm	4 in-10 cm
Ounces	4.6	4.3	4.0
Grams	131	122	113



Pro-link internal steel beam system

VARI-WEIGHTS™



	Ounces	Grams
Module	1.5	43
1/2 Module	0.75	21
Cap	1.5	43



FLAT VARI-WEIGHTS 5/16-24 THREAD

	Ounces	Grams
Halcyon/Contour Base	2.0	57
1 Oz.	1.0	28.5
2 Oz.	2.0	57
4 Oz.	4.0	114



ALSO AVAILABLE IN BLACK

MOUNTS

FIXED V-BAR WITH BOLT

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt— included



CONTOUR™ AND Z-FLEX™ V-BAR CONNECTOR BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down



ADJUSTABLE SIDE ROD ADAPTER

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Stainless steel eye bolt included



ADJUSTABLE V-BAR WITH BOLT

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Suitable for compound or recurve bows
- Stainless steel eye bolt included



NEW ULTRALIGHT FIXED V-BAR WITH BOLT

- Compact design & minimal weight for improved bow balance
- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" connector bolt— included



QUICK DISCONNECT MOUNT

- Stainless steel
- 7075 alloy
- Precision design
- Zero and 10 degree drop models available



NEW ULTRALIGHT ADJUSTABLE SIDE ROD ADAPTER WITH QUICK DISCONNECT

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Connector bolt included



NEW ULTRALIGHT ADJUSTABLE V-BAR WITH QUICK DISCONNECT

- Infinite adjustability
- Cup and cone joint for solid lock-down
- Suitable for compound or recurve bows
- Connector bolt included



TOOLS & SUPPLIES

QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz.
- HIT approved



CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



BCY™ POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75-yard spool



FASTSET™ VANE GEL

- Sizes: 3 gram



HIT EPOXY SINGLE USE

- Provides a permanent bond
- Flexible, non-brittle formulas



UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz.



QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



FLETCH-TITE® PLATINUM

- Size: 22-gram tube



HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick
- Available in 10" shop stick



FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



WEDGE ARROW PULLER

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- Available in 1m lengths and 50ft spools



TOOLS & SUPPLIES

ELITE NOCK AND D-LOOP PLIERS

- Maximizes mechanical advantage for tightest possible D-loops
- Patented dual-jaw design
- Convenient and versatile archery tool
- Six tools in one



PRO ARCHERY NEEDLE-NOSE PLIERS

- A must have for any serious bow mechanic
- Rubber-coated handle
- Needle-nose plier design with archery specific features for D-loop stretching and hot-melt point installation



ARCHERY OMNI TOOL BY FIX-IT STICKS® - 17 PIECE

- Integrates 17 of the most popular Standard & Metric Hex, and Star bit sizes into the most compact archery tool ever produced
- Snaps together in a T-shape for leverage
- Includes the following bit sizes:
Standard Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050"
Metric Sizes: 1.5, 2.5, 3.0
Star Tip Sizes: T10, T15, T20



PRO HEX FOLD UP SET - STANDARD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050



PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16
- Metric: 1.5, 2.5, 3.0, and a 1/8" flat blade screwdriver



PRO HEX STUBBY 10 PIECE "L" WRENCH SET - XL


- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



TOOLS & SUPPLIES


BOW SQUARES

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up

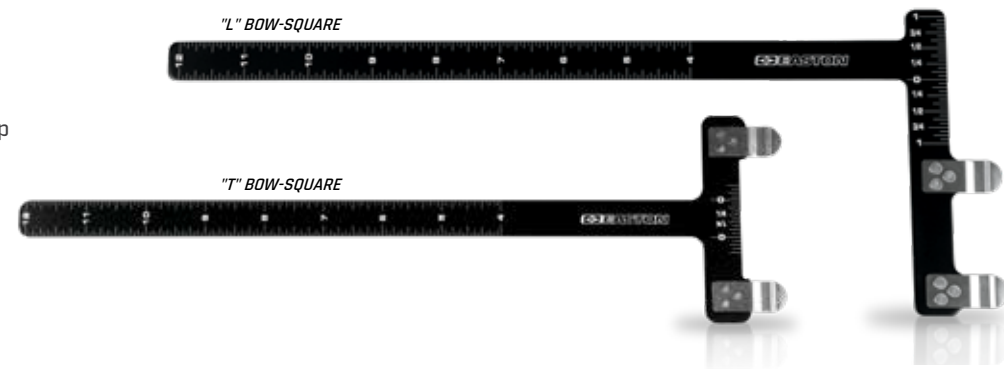

9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from 4MM to 27/64" diameters

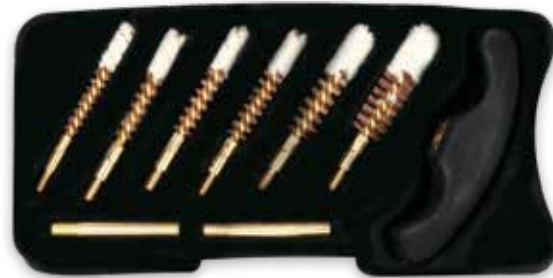

ARCHERY ESSENTIALS™ TOOL KITS

- Kit items save 30% versus items sold separately
- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors

12 and 8-PIECE KITS INCLUDES:

- Extra large folding allen wrench set
- Nock installation & removal tool
- Wedge arrow puller
- Zippered case cube
- Bowstring wax
- Serving thread
- D-Loop rope
- Broadhead wrench

12-PIECE KIT ADDS:

- D-Loop pliers
- Bow-square-L model
- Small folding allen wrench set
- Arrow prep tool kit



8-PIECE VALUE PACK



12-PIECE PRO SHOP

SHOOTING ACCESSORIES



STAY SHARP™ BROADHEAD CASE

- Grippers ensure broadhead sharpness by supporting ferrules without contacting blades
- Hold six mechanical or fixed-blade broadheads
- Durable ABS body with snap-fit locking polycarbonate end caps
- Compatible with most Deep-Six and standard 8-32 broadheads
- Dimensions: approximately 5"W x 4"H x 2"D

DELUXE ARM GUARD

- Progressive designs molded from durable polycarbonate material
- Durable elastic straps ensure a snug fit
- Available in oval and "dog" bone shapes
- Colors: blue, red, yellow, and smoke



COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: black



DELUXE PARACORD DIAMOND WRIST SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: black, camo, green, pink, blue, red, and orange



CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models: XS, S, M, L, XL, and XXL
- Color: black/white



STIFF WRIST SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: black, camo, green, pink, blue, red, and orange



NEOPRENE WRIST SLING


- Durable, lightweight neoprene construction
- Easy-adjust strap



COMPETITION QUIVERS

ELITE™ FIELD QUIVER WITH BELT

- European-inspired luxurious design
- Technical synthetic leather construction
- Infinitely adjustable and sturdy, Elite quiver belt uses secure T-style buckle
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet, customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included-release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white

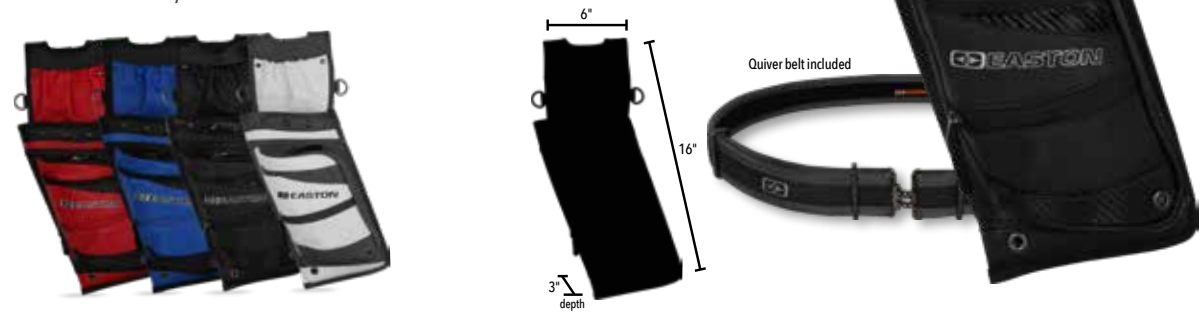

ELITE™ QUIVER BELT

- One size fits most
- T-style buckle
- Included with Elite quivers—also sold separately
- Colors: red, blue, grey, carbon black, and white




ELITE™ RELEASE POUCH



ELITE™ TAKEDOWN HIP QUIVER WITH BELT

- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, Elite quiver belt with T-style buckle for secure operation-included
- Allows quiver body tube to separate from belt loop for easy storage
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included- release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white

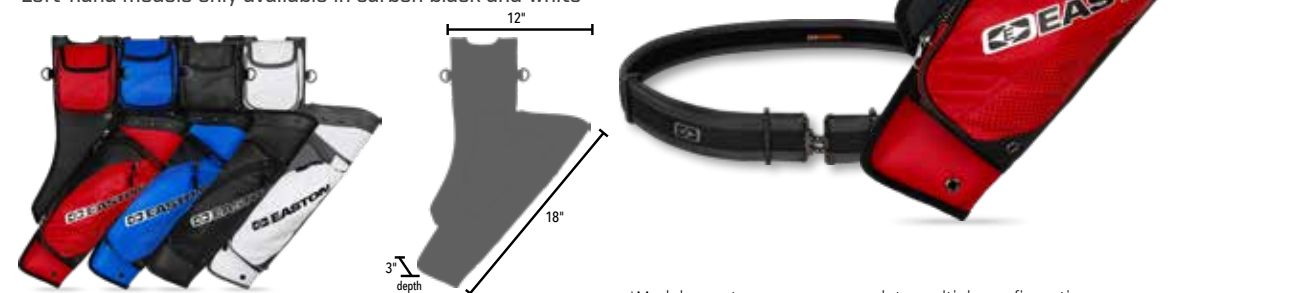

*Modular system can accommodate multiple configurations

DELUXE FIELD QUIVER WITH BELT

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Adjustable, sturdy Deluxe Quiver belt with T-style buckle included
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch sold separately
- Colors: silver, red, blue, and black
- Left-hand models only available in black and silver



DELUXE QUIVER BELT

- One size fits most
- Innovative hook-and-loop adjustment
- Easy on/off T-buckle connection



DELUXE RELEASE POUCH



DELUXE TAKEDOWN HIP QUIVER WITH BELT

- Allows quiver body tube to separate from belt loop for easy storage
- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Adjustable Deluxe Quiver Belt with T-style buckle included
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory-attachment rings
- Colors: silver, red, blue, and black
- Left-hand models only available in black and silver



RECREATIONAL QUIVERS

FLIPSIDE™ 4-TUBE HIP QUIVER WITH BELT

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop pocket for right/left side wear
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: black, red, blue, Realtree Edge®, & ranger green



FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: black, red, blue, Realtree Edge®, & ranger green



FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: black, red, blue, Realtree Edge®, & ranger green



REPLACEMENT FLIPSIDE™ ARROW TUBE



REPLACEMENT BELT CLIP



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

TRAVEL BOWCASES

BOWTRUK™ GEN 2 4716, 4017 & 3616 TRAVEL BOWCASE

- Accommodates two bows up to 47 inch overall length
- Ballistic nylon shell with TPU coated exterior for durability
- Six interior & exterior accessory pockets for bow-sights, gear, and arrows
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Double seatbelt-style bow retaining straps
- Padded carry handle
- Compatible with Easton arrow totes & boxes
- Hybrid hard/soft shell perimeter protection
- Dark grey
- 47" L X 16" W X 9" H (Model 4716)
- 40" L X 17" W X 9" H (Model 4017)
- 36" L X 16" W X 9" H (Model 3616)



BOWCASES

WORLD CUP™ 4517

- Accommodates one bow up to 45" in overall length
- Overall dimensions 45" long x 17" high
- 9 interior and exterior accessory pockets with dedicated compartments for stabilizers and arrow storage
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors coordinate with Easton Deluxe Hip/Field quivers
- Dense 360° exterior/corner cam padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Shoulder strap included
- Colors: black



BOWCASES

NEW WORKHORSE MAX™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Ten interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Shoulder strap included
- Colors: Charcoal grey, Tundra Tan



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

WORKHORSE™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Eight interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Re-positionable hook-and-loop bow anchor system
- Dense 360° exterior padding
- Shoulder strap included
- Colors: Charcoal, Realtree Edge



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

BOW-GO™ 4118 NEW COLOR

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow mounted quivers and maximum inside storage
- Four interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors: Black, Ranger Green, Realtree Edge, Olive/Grey



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

BOWCASES

MICRO FLATLINE™ 3618 NEW COLOR

- Accommodates one bow up to 36" in overall length
- Overall dimensions 36" long x 18" high
- Dedicated outer snap-lock mesh accessory pocket
- Premium zippers with easy-grab molded pulls
- Multi-colored front printing design
- Colors, Black/Grey, Tundra Tan, Realtree Edge



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

GENESIS™ 4014

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Blue, Black and Pink
- 40" L x 14" H



BOWSLICKER™

- Easy, secure carry with patented limb loop design
- Quick and quiet removal
- Keep cams and strings protected from brush
- Fits all compound bows, including parallel limbs, up to 36" axle-to-axle
- Color: Olive Green



Officially Licensed Product
Protected by US Patents:
9,038,878 & 9,310,158



BOWCASE ACCESSORIES

CASE CUBES™

BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
 - Holds arrows securely (with or without points)
 - Four sizes:
- Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
 Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
 Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
 Round Arrow Tote (12-arrow) - adjustable length



PACKS

CLUB XT™ RECURVE BACKPACK

- Affordable recurve backpack with great features
- High-denier fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: grey, blue, red, and black



DELUXE RECURVE BACKPACK

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



UNIVERSAL RAIN COVER

- Compatible with Deluxe & Club XT recurve backpacks

TARGET SHAFT MODELS

Aluminum/Carbon	Materials/Construction	Points	Nock System	Nock Type	Weight Tolerance	Straightness ¹	Color/Finish	Sizes
X10™ PROTOUR™	High-strength carbon fiber bonded to a precision 7075 alloy core tube –single-taper shaft	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	3.2MM X10	Pin Nocks	±0.5 grains	±.0015"	Polished Black Carbon	770, 720, 670, 620, 570, 520, 470, 420, 380, 340
A/C/E®	High-strength carbon fiber bonded to a precision 7075 alloy core tube –barreled shaft	4MM HL	4MM	Pin Nocks or Direct Fit	±0.5 grains	±.0015"	Polished Black Carbon	(1250, 1100) ³ ; 1000, 920, 850, 780, 720, 670, 620, 570, 520, 470, 430, 400, 370
X10 PARALLEL PRO™	High-strength carbon fiber bonded to a precision 7075 alloy core tube –parallel shaft	4MM HL	4MM	Pin Nocks or Direct Fit	±0.5 grains	±.0015"	Polished Black Carbon	1150, 1000, 880, 810, 710, 660, 610, 570, 520, 470, 420, 380, 340, 300, 250
Carbon	Materials/Construction	Points	Nock System	Nock Type	Weight Tolerance ²	Straightness ²	Color/Finish	Sizes
AVANCE™	Uniform Spine Acu-Carbon	4MM ML	4MM	Pin Nocks or Direct Fit	NA	±.0025"	Black, Smooth-matte Finish	340, 400, 450, 500, 550, 600, 660, 730, 810, 900, 1000, 1150, 1400, 1600, 1800, 2000
AVANCE SPORT™	Uniform Spine Acu-Carbon	4MM ML	4MM	Pin Nocks or Direct Fit	NA	±.005"	Black, Smooth-matte Finish	340, 400, 450, 500, 550, 600, 660, 730, 810, 900, 1000, 1150, 1400, 1600, 1800, 2000
VECTOR™	Multi layered wrapped Carbon Fiber	4MM Zinc 5MM Zinc	4MM, Zinc	N Nock	NA	NA	Black, Smooth-matte Finish	600, 800, 1000, 1200, 1400, 1600, 1800, 2000
VECTOR READY TO SHOOT	Multi layered wrapped Carbon Fiber	4MM	4MM, Zinc	N Nock	NA	NA	Black, Smooth-matte Finish	600, 800, 1000, 1200, 1400, 1600, 1800, 2000
SONIC 6.0™	Uniform Spine Acu-Carbon	6MM	6MM	H Nock	±2 grains	±.003"	Black Micro Smooth	600, 500, 400, 340, 300, 250
VENTURE™	Uniform Spine Acu-Carbon	6MM	6MM	H Nock	NA	±.003"	Black Micro Smoot	600
EASTON 6.5™	Uniform Spine Acu-Carbon	6.5MM	6.5 Microlite	Super Nock	NA	±.001" ±.003" ±.006"	Black Micro Smooth	500, 400, 340, 300, 250
SUPERDRIVE MICRO™	Multi-layer wrapped Carbon fiber	4MM HL	4MM	Pin Nocks or Direct Fit	±.005"	±.005"	Black, Smooth-matte Finish	325, 375, 425, 475, 525, 575, 625, 675, 750, 850, 950
SUPERDRIVE 23™	Multi-layer wrapped Carbon fiber	One-piece	4MM 6.5MM	Pin Nocks or Direct Fit	±1 grains	±.003"	Black, Smooth-matte Finish	475, 375, 325
SUPERDRIVE 25™	Multi-layer wrapped Carbon fiber	One-piece	4MM 6.5MM	Pin Nocks or Direct Fit	±1 grains	±.002"	Black, Smooth-matte Finish	290
SUPERDRIVE 27™ SUPERDRIVE 27™ PRO	Multi-layer wrapped Carbon fiber	One-piece	4MM 6.5MM	Pin Nocks or Direct Fit	NA	±.005" ±.002"	Black, Smooth-matte Finish	270
Aluminum	Aerospace Alloy	Points	Nock System	Nock Type	Weight Tolerance ²	Straightness ¹	Color/Finish	Sizes
RX7™	7178-T9	One-piece Bullet	6.5MM	Direct Fit	±3/4%	+ .001"	Hard-Anodized Silver and Blue	23-420, 22-475, 21-525
X² 3™ X² 7™	7178-T9	One-piece Bullet	6.5MM	Direct Fit	±3/4%	+ .001"	Hard-Anodized Silver and Black	2312, 2314, 2315, 2318 2712
X7 ECLIPSE™	7178-T9	One-piece Bullet	4MM 6.5MM	Direct Fit	±3/4%	±.001"	Hard-Anodized Polished Black	1514, 1614, 1714, 1814, 1914, 2014, 2114, 2213, 2214, 2314, 2413, 2512, 2613
GENESIS™	7075-T9	One-piece Point	4MM N Nock	Direct Fit	±2.5 grains	±.005"	Hard-Anodized Purple, Silver, Black, Teal	1820
XX75 PLATINUM™ PLUS	7075-T9	One-piece Bullet, or RPS Point	4MM 6.5MM	Direct Fit	±1%	±.002"	Hard-Anodized Platinum Grey	1416, 1516, 1616, 1716, 1816, 1913, 1916, 2013, 2016, 2114, 2213
JAZZ®	7075-T9	One-piece Bullet, or RPS Point	4MM 6.5 MM	Direct Fit	±2%	±.005"	Hard-Anodized Black/Silver	1214, 1416, 1516, 1616, 1716, 1816, 1916, 2016

1 Guaranteed straight to more stringent standards than ATA/ASTM methods.
 2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.
 3 Grains-per-shafts in a dozen bundle.
 Eclipse and Platinum Plus sizes in italics use UNI System and ®/™ Registered Trademark of Easton.

ARCHERY EXPERTS

For more information on arrow preparation and assembly, visit: WWW.EASTONARCHERY.COM

ALLOY SHAFT & COMPONENT SPECIFICATIONS

Size	Shaft Weight		Spine @ 28" Span	Minimum Stock Length		UNI System			Adjustable Points	NIBB Point	One-piece Bullet Point	RPS Insert Alum.	RPS Point Size
	XX75	X7		XX75	X7	UNI Bushing	X Nock Bushing	Super UNI Bushing					
	Grains per Inch		Deflection in Inches	Inches		Grains	Grains	Grains	Grains	Grains ²	Grains	Grains ²	Grains
1214	5.9	—	2.501	25.50	—	—	—	—	—	—	45	—	—
1416	7.2	—	1.684	26.25	—	2	—	—	—	—	46	50	—
1514	—	6.8	1.384	—	25.00	5	—	—	—	61 ³	50	—	—
1516	7.3	—	1.405	26.75	—	3	—	—	—	—	48	50	—
1614	—	7.7	1.157	—	26.75	5	—	—	—	—	51	50	—
1616	8.4	—	1.082	27.50	—	5	—	—	—	—	56	60	—
1714	—	8.1	0.967	—	27.75	7	—	—	—	—	56	60	—
1716	9.0	—	0.882	29.00	—	7	—	—	—	—	60	65	10
1814	—	8.6	0.804	—	29.50	8	—	—	—	—	60	65	—
1816	9.3	—	0.759	29.00	—	8	4	—	—	—	63	75	12
1820	12.2	—	0.595	29.00	—	—	—	—	—	—	59	—	—
1913	8.3	—	0.738	31.00	—	9	—	—	—	—	64	90	18
1914	—	9.3	0.663	—	29.50	9	—	—	—	—	64	90	—
1916	10.0	—	0.627	30.00	—	9	7	—	—	—	72	90	16
2013	9.0	—	0.616	32.00	—	—	—	5	—	—	68	90	21
2014	—	9.6	0.584	—	31.50	—	—	5	100	—	71	90	—
2016 (500)	10.6	—	0.537	31.00	—	—	—	4	—	—	90	20	5/16
2018	12.3	—	0.468	30.50	—	—	—	4	—	—	90	19	5/16
2114	9.9	9.9	0.513	30.00	31.00	—	—	7	—	—	78	90	25
2117 (400)	12.0	—	0.413	31.50	—	—	—	7	—	—	100	25	5/16
2213	9.8	9.9	0.464	30.50	32.00	—	—	9	—	—	88	90	30
2214	—	10.4	0.431	—	31.90	—	—	9	100	103	100	—	—
2215	10.7	9.5	0.425	31.50	—	—	—	9	—	—	100	30	11/32
2216	12.0	—	0.382	32.00	—	—	—	9	100	—	100	29	11/32
2219	13.8	—	0.342	32.00	—	—	—	9	—	—	100	29	11/32
2312	—	9.5	0.429	—	31.75	—	—	11	—	—	99	100	37
2314	10.7	10.8	0.377	32.00	32.25	—	—	10	100	—	100	34	11/32
2315 (340)	11.7	11.7	0.340	32.00	32.6	—	—	11	100	—	100	37	11/32
2317	13.3	—	0.303	32.00	32.75	—	—	11	100	—	100	37	11/32
2318	—	13.7	0.304	—	32.75	—	—	11	—	—	200	—	—
2413	10.4	10.5	0.372	—	34.00	—	—	12	—	—	110	100	40
2512	—	10.3	0.329	—	33.00	—	—	15	—	—	108	100	52
2613	—	11.5	0.272	—	33.00	—	—	17	—	—	150	58	3/8
2712	—	11.3	0.267	—	33.00	—	—	19	200	—	150/300	—	—

— Indicates not available
 1 Length is approximate stock shaft length for each size.
 2 NIBB point grain weights are ±0.5 grain. All other components are ±1 grain

LIMITED WARRANTY

The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see www.eastonarchery.com.

! WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE AT WWW.BSAFE.WS OR 877-INFO-ETP (877-463-6387).

CHECK EVERY ARROW, EVERY SHOT

ARROW DAMAGE

Any arrow can be damaged, even when new. A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. Damage to an arrow shaft, or any of its components, may occur from improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

ARROW USE PRECAUTIONS

Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft and all arrow components to see that they have not been damaged. Place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged (see arrow inspection information at www.eastonarchery.com/warning-use/). If your arrow is crested, inspect for damage on the crest surface and for any soft spots under the crest wrap. You may need to remove the cresting to make a thorough inspection. If damage is present, DISCARD THE ARROW.

WARNING! NEVER SHOOT A DAMAGED ARROW.

A loose or damaged nock may indicate a damaged arrow shaft or otherwise be dangerous. Before each shot, inspect the nock for damage and check that it is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or turns easily, inspect for cracks in the arrow shaft. If there are cracks in the arrow shaft, or if the nock is loose or is damaged, DISCARD THE ARROW.

WARNING! NEVER SHOOT AN ARROW WITH A LOOSE OR DAMAGED NOCK.

BOW INSPECTION

Before shooting any arrow, it is critical to inspect your bow, including all components, to be sure that it is properly adjusted and in good working order. Arrows should only be used with bows that have a correct pull weight and draw length (see arrow selection chart at www.eastonarchery.com/shaft-selector/). Selecting the correct arrow and arrow length for the bow is the responsibility of the shooter, and failure to do so could result in personal injury and/or equipment damage. **WARNING! NEVER SHOOT AN ARROW WITH AN IMPROPERLY ADJUSTED OR DAMAGED BOW.**

ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:

1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel, look and listen for cracking (Figure 1). Perform this test 4 to 6 times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**



2. While still holding the point and fletching ends of the arrow, twist the shaft in opposite directions (Figure 2). If the arrow "relaxes" or twists easily, the carbon has been damaged. DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.** A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**



CARBON ARROW CUTTING

Only cut a carbon arrow using a high-speed arrow cut-off saw. Using any other saw or cutting device may cause damage to the arrow. If an arrow has been cut without using a high-speed arrow cut-off saw, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

SOLVENTS

CAUTION: When removing fletchings, or for any other reason, do not soak any carbon arrow shaft in solvents. This can weaken the resin that bonds the carbon fibers. (For directions on arrow set up, refer to the Easton Tuning Guide.)

WARNING! NEVER SHOOT A DAMAGED ARROW.

To reduce your risk of serious injury or death, you must read and understand all safety warnings and instructions. If you do not understand these instructions, or cannot adequately perform the above tests, STOP and seek appropriate assistance before shooting any arrow.

! WARNING: Cancer and Reproductive Harm — www.P65Warnings.ca.gov

Some of the products listed in this Product Guide may be subject to California Proposition 65 warnings requirements. See product packaging or website for specific warning information. This Product Guide is intended for informational purposes only, not a solicitation for product sales.


EASTON

CONNECTING YOU TO THE 10 RING.



A TARGET ARCHERY LEGEND.

X10 arrow shafts stand as the ultimate testament to precision and performance winning every Olympic medal since 1996. Crafted with the finest aluminum and carbon (AC) materials using Easton's exclusive proprietary process, each X10 shaft embodies meticulous attention to detail. From the choice of materials to the intricacy of engineering, no element is left to chance. With an unyielding emphasis on accuracy, these shafts empower archers to reach unmatched levels of excellence with every release. Experience the zenith of precision, where every facet contributes to hitting the 10-ring, shot after shot.

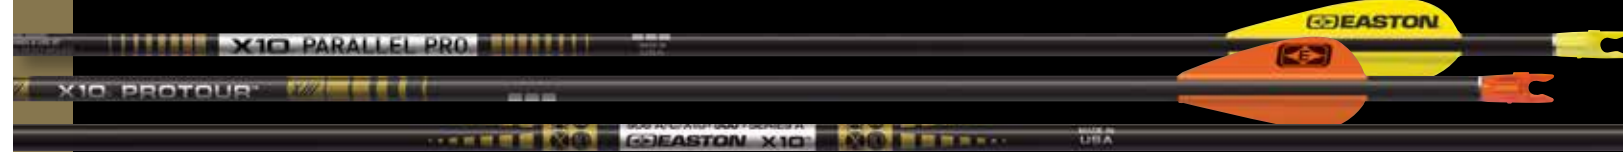



*Made In USA
Winning Worldwide*

E EASTON

